


ZHR-3017 Rotary Solenoids



总重量 Total Weight: 45g
应用范围: 玩具等
APPLICATION: TOY etc

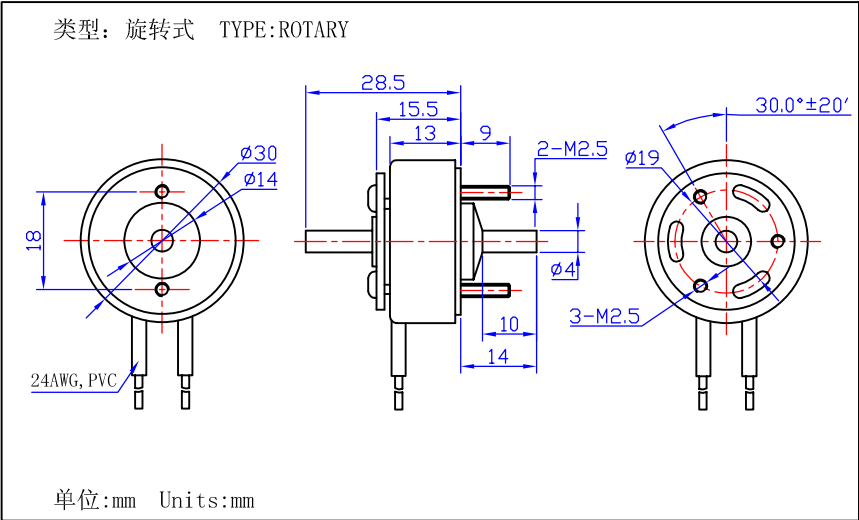

ZHR

综合特性 GENERAL FEATURES

1. 使用电压范围
USE VOLTAGE RANGE
2. 吸引力 (ATTRACTING FORCE)

DC25. 23 ~ 0. 8V
DC25. 2 ~ 30. 8V

旋转角度 (°)	开始转矩 (Starting Torque): mNm (20°)
45°	11. 3
35°	22. 6
25°	22. 6

3. 耐电压
(DIELECTRIC STRENGTH)

线圈和框架间 AC1000V (50/60Hz) 1Min 或
AC1200V (50/60Hz) 1Sec (击穿电流 5mA)
BETWEEN COIL AND FRAME AC1000V (50/60Hz) 1Min OR
AC1200V (50/60Hz) 1Sec (5mA)

4. 温升
(TEMPERATURE RISE)

在电压 DC-28V 下, 温升为 85°C Max
AFTER DC-28V APPLIED BY RESISTANCE METHOD 85 deg MAX

5. 寿命
(LIFE)

典型值为 10 万次 (通电 1 秒, 断电 2 秒)
REPETITIVE OPERATION FOR 0. 1 MILLION CYCLE (ON: 1Sec
OFF: 2Sec) at DC12V

COIL DATA 线圈资料

RATED PARAMETER/额定参数	
Voltage/电压:	DC28V
Current/电流:	0. 27A
Wattage/功率:	7. 5W
Use voltage range/使用电压范围:	DC27V~29V
Dc resistance/直流电阻:	105Ω (or dc ±10%(testing temp 20° C)