

ZHV-0626L Solenoids Valve



总重量 Total Weight: 20g
应用范围: 美腿机等
APPLICATION: LEG BEAUTIFIER etc


综合特性 GENERAL FEATURES

1. 常用压力: 300mmHg
In common use pressure: 300mmHg
2. 使用压力范围: 0 ~ 380mmHg
Use pressure range: 0 ~ 380mmHg
3. 密封件: 丁腈橡胶, 硅橡胶
Working pressure: Nbr, Mvq
4. 寿命: 最小工作50万次
Wrok Life: Work 0.5 million Min.
5. 漏气量: 小于12mmHg/30Sec
Air-leakage volume: Less than 12mmHg/30Sec

COIL DATA线圈资料


$\text{Duty cycle (\%)} = \frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$ $\text{工作周期 (\%)} = \frac{\text{工作时间}}{\text{工作时间} + \text{断开时间}} \times 100\%$			Continuous (100%) 连续 (100%)	Or less (50%) 间断 (50%)	Or less (25%) 间断 (25%)	Or less (10%) 间断 (10%)
MAX. "on" time in seconds 最大工作时间 (秒)				5	3	
Watts at 20°C 瓦特数 (在20°C)				1.8	2.3	
Ampere-turns at 20°C 安匝值 (在20°C)				339	388	
Type no. 型号	Resistance (20°C) Ω ± 10% 阻值 (Ω) ± 10%	No. Turns 线圈匝数	VoltS DC 电压			
ZHV-0626L	20	1130	6			
	63	2000	12			

类型: 二位三通 TYPE: Two way three port

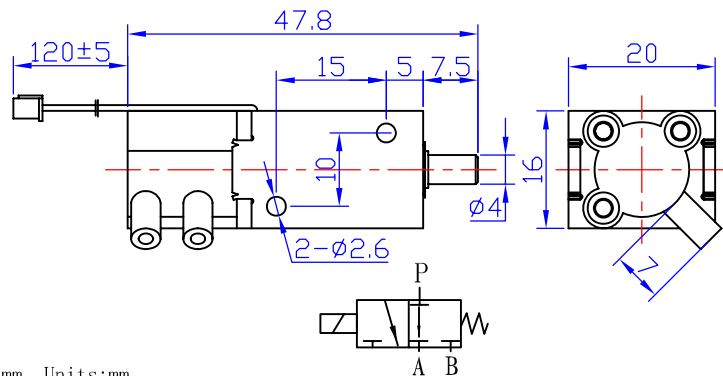

单位:mm Units:mm

类型: 二位二通 TYPE: Two way two port

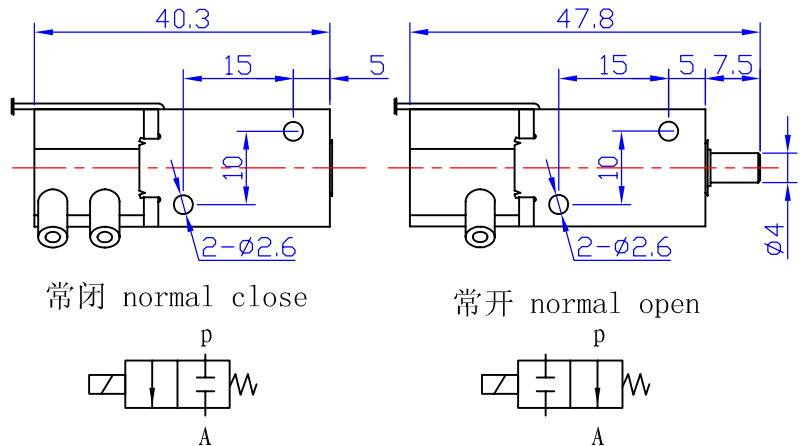

ZHV